


INTERLOCK "V" : BSP 60°

F4B

coudé à 45°

NORMES : BS 5200/86
NCB174

FILETAGE : BSPP
ISO 228

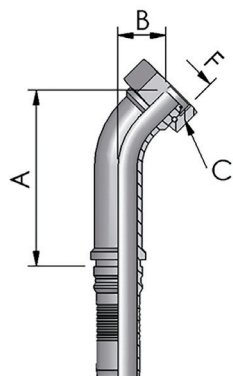

D.N.		Référence		Filetage	Dimensions (mm)				
mm	"	Code	Désignation	F	C	Ø inter.	L	A	B
20	3/4"	◆	V20 F4B 3/4"	3/4"	32	14,5	142,0	80,0	27,0
20	3/4"	◆	V20 F4B 1"	1"	41	14,5	128,0	66,0	31,0
25	1"	3412534	V25 F4B 1"	1"	38	21,0	181,0	109,0	33,0
25	1"	◆	V25 F4B 1"1/4	1"1/4	50	21,0	185,0	113,0	36,0
32	1"1/4	3413242	V32 F4B 1"1/4	1"1/4	50	26,5	218,0	131,0	37,0
32	1"1/4	◆	V32 F4B 1"1/2	1"1/2	55	26,5	191,0	104,0	46,0
40	1"1/2	3414049	V40 F4B 1"1/2	1"1/2	55	32,0	211,0	119,0	48,0
50	2"	3415060	V50 F4B 2"	2"	70	44,0	284,0	187,0	44,0


Notes

F9B

coudé à 90°

NORMES : BS 5200/86
NCB174

FILETAGE : BSPP
ISO 228



D.N.		Référence		Filetage	Dimensions (mm)				
mm	"	Code	Désignation	F	C	Ø inter.	L	A	B
20	3/4"	◆	V20 F9B 3/4"	3/4"	32	14,5	109,0	47,0	54,0
20	3/4"	◆	V20 F9B 1"	1"	41	14,5	116,0	54,0	61,0
25	1"	3422534	V25 F9B 1"	1"	38	21,0	141,0	69,0	69,0
25	1"	◆	V25 F9B 1"1/4	1"1/4	50	21,0	140,0	68,0	74,0
32	1"1/4	3423242	V32 F9B 1"1/4	1"1/4	50	26,5	172,0	85,0	80,0
32	1"1/4	◆	V32 F9B 1"1/2	1"1/2	55	26,5	175,0	88,0	94,0
40	1"1/2	3424049	V40 F9B 1"1/2	1"1/2	55	32,0	197,0	105,0	101,0
50	2"	3425060	V50 F9B 2"	2"	70	44,0	224,0	127,0	110,0

Notes

En fonction des évolutions techniques, les données peuvent être modifiées sans préavis - Photo non contractuelle - Les normes sont citées à titre indicatif.

