


INTERLOCK "V" : ORFS

F40S

coudé à 45°

NORMES : ISO 8434-3
SAE J1453/J516

FILETAGE : UNF
ASME B1.1

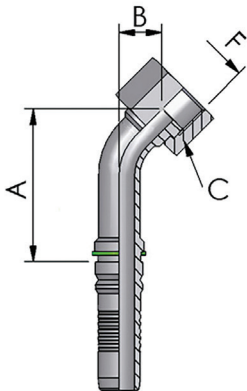

D.N.		Référence		Filetage	Dimensions (mm)				
mm	"	Code	Désignation	F	C	Ø inter.	L	A	B
20	3/4"	♦	V20 F40S 1"3/16	1"3/16-12	36	14,5	136,0	74,0	21,0
25	1"	♦	V25 F40S 1"7/16	1"7/16-12	41	21,0	176,0	104,0	29,0
32	1"1/4	♦	V32 F40S 1"11/16	1"11/16-12	50	26,5	183,0	96,0	42,0
40	1"1/2	♦	V40 F40S 2"	2"-12	60	32,0	240,0	148,0	35,0


Notes

F90S

coudé à 90°

NORMES : ISO 8434-3
SAE J1453/J516

FILETAGE : UNF
ASME B1.1



D.N.		Référence		Filetage	Dimensions (mm)				
mm	"	Code	Désignation	F	C	Ø inter.	L	A	B
20	3/4"	♦	V20 F90S 1"3/16	1"3/16-12	36	14,5	110,0	48,0	46,0
25	1"	♦	V25 F90S 1"7/16	1"7/16-12	41	21,0	140,0	68,0	63,0
32	1"1/4	♦	V32 F90S 1"11/16	1"11/16-12	50	26,5	170,0	83,0	74,0
40	1"1/2	♦	V40 F90S 2"	2"-12	60	32,0	194,0	102,0	84,0

Notes

En fonction des évolutions techniques, les données peuvent être modifiées sans préavis - Photo non contractuelle - Les normes sont citées à titre indicatif.

